



RADIO TEST REPORT

ETSI EN 300 220-1 V3.1.1 (2017-02)

ETSI EN 300 220-2 V3.2.1 (2018-06)

Product: LoRa Module

Trade Mark: B&T 博通



Model Name: Ra-01

Family Model: N/A

Report No.: S20031100204001

Prepared for

Shenzhen Ai-Thinker Technology Co., Ltd

Room 701, Building B, Huafeng Industrial Park, Hangkong Road, Sanwei
Community, Baoan District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Ai-Thinker Technology Co., Ltd
Address : Room 701, Building B, Huafeng Industrial Park, Hangkong Road, Sanwei Community, Baoan District, Shenzhen, China
Manufacturer's Name : Shenzhen Ai-Thinker Technology Co., Ltd
Address : Room 701, Building B, Huafeng Industrial Park, Hangkong Road, Sanwei Community, Baoan District, Shenzhen, China

Product description

Product name : LoRa Module

Trademark :  , 

Model and/or type reference ... : Ra-01

Family Model : N/A

Rating(s) : DC 3.3V form Uart

Standards : ETSI EN 300 220-1 V3.1.1 (2017-02)
ETSI EN 300 220-2 V3.2.1 (2018-06)

This device described above has been tested by Shenzhen NTEK, and the test results show that the equipment under test (EUT) is in compliance with the article 3.2 of Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 11 Mar. 2020 ~23 Apr. 2020

Date of Issue : 23 Apr. 2020

Test Result : **Pass**

Testing Engineer :




(Jerry Xie)

Technical Manager :



(Jason Chen)

Authorized Signatory :



(Sam Chen)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST CONDITIONS	11
2.3 DESCRIPTION OF SUPPORT UNITS	12
2.4 TEST CONDITIONS	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . OPERATING FREQUENCY	15
3.1 LIMITS OF OPERATING FREQUENCY	15
3.2 TEST PROCEDURE	15
3.3 CONFORMANCE	15
4 . EFFECTIVE RADIATED POWER	16
4.1LIMITS OF EFFECTIVE RADIATED POWER	16
4.2 TEST PROCEDURE	16
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	17
4.5 TEST RESULTS	18
5 . MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY	19
5.1 APPLICABILITY	19
5.2 LIMITS OF MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY	19
5.3 TEST PROCEDURES	19
5.4 TEST SETUP	19
5.5 TEST RESULTS	20
6. DUTY CYCLE	21
6.1 APPLICABILITY	21
6.2 LIMITS OF DUTY CYCLE	21
6.3 TEST PROCEDURE	21
6.4 TEST SETUP	21
6.5 TEST RESULTS	22
7.OCCUPIED BANDWIDTH	23

Table of Contents	Page
7.1 APPLICABILITY	23
7.2 LIMITS OF OCCUPIED BANDWIDTH	23
7.3 TEST PROCEDURE	23
7.4 TEST SETUP	23
7.5 TEST RESULTS	24
8. TX OUT OF BAND EMISSIONS	25
8.1 APPLICABILITY	25
8.2 LIMITS OF TX OUT OF BAND EMISSIONS	25
8.3 TEST PROCEDURES	25
8.4 TEST SETUP	25
8.5 TEST RESULTS	26
9. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	27
9.1 APPLICABILITY	27
9.2 LIMITS OF UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	27
9.3 MEASURING INSTRUMENTS AND SETTING	27
9.4 TEST PROCEDURES	27
9.5 TEST SETUP LAYOUT	28
9.6 EUT OPERATION DURING TEST	29
9.7 TEST RESULTS	30
10 TRANSIENT POWER	32
10.1 APPLICABILITY	32
10.2 LIMITS OF TRANSIENT POWER	32
10.3 TEST PROCEDURES	32
10.4 TEST SETUP	32
10.5 TEST RESULT	33
11. ADJACENT CHANNEL POWER	34
11.1 APPLICABILITY	34
11.2 LIMITS OF ADJACENT CHANNEL POWER	34
11.3 TEST PROCEDURES	34
11.4 TEST SETUP	34
11.5 TEST RESULT	35
12. TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS	36
12.1 APPLICABILITY	36

Table of Contents	Page
12.2 LIMITS OF TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS	36
12.3 TEST PROCEDURES	36
12.4 TEST SETUP	36
12.5 TEST RESULT	37
13. ADAPTIVE POWER CONTROL	38
13.1 APPLICABILITY	38
13.2 LIMITS OF ADAPTIVE POWER CONTROL	38
13.3 TEST PROCEDURES	38
13.4 TEST SETUP	38
13.5 TEST RESULT	39
14. RX SENSITIVITY LEVEL	40
14.1 APPLICABILITY	40
14.3 TEST PROCEDURES	40
14.4 TEST SETUP	40
14.5 TEST RESULTS	41
15. BLOCKING	42
15.1 APPLICABILITY	42
15.2 LIMITS OF BLOCKING	42
15.3 TEST PROCEDURES	43
15.4 TEST SETUP	43
15.5 TEST RESULTS	44
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	45

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

ETSI EN 300 220-1 V3.1.1 (2017-02)

ETSI EN 300 220-2 V3.2.1 (2018-06)

Clause	Description of Test Item	Results(Pass/Fail)	N.T(Not Test)
Transmitter Parameters			
4.2.1	Operating frequency	Pass	
4.3.1	Effective Radiated Power	Pass	
4.3.2	Maximum Effective Radiated Power spectral density	Pass	
4.3.3	Duty Cycle	Pass	
4.3.4	Occupied Bandwidth	Pass	
4.3.5	Tx Out Of Band Emissions	Pass	
4.2.2	Unwanted emissions in the spurious domain	Pass	
4.3.6	Transient power	Pass	
4.3.7	Adjacent Channel Power		N.T
4.3.8	TX behaviour under Low Voltage Conditions	Pass	
4.3.9	Adaptive Power Control		N.T
4.4.1	RX sensitivity level		N.T
4.4.2	Blocking	Pass	

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

FCC Registered No.: 463705 IC Registered No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.



No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

Revision History

Report No.	Version	Description	Issued Date
S20031100204001	Rev.01	Initial issue of report	23 Apr. 2020

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	LoRa Module	
Brand Name	 , 	
Model Name.	Ra-01	
Family Model	N/A	
Model Difference	N/A	
Product Description	The EUT is LoRa Module	
	Operation Frequency Band:	Band H: 433.050 MHz to 434.790 MHz
	Modulation Type:	LoRa/FSK/OOK
	Antenna Gain(Peak)	3dBi
	Antenna Designation:	Spring Antenna
	Power Rating	DC 3.3V form Uart
	Receiver Category	1
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Refer to below(Note 2)	
Adapter	N/A	
Battery	N/A	
Hardware Version	V3.2	
Software Version	V1.00	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Test Channel:

TX

Channel	Frequency (MHz)
01	433.96
--	--


RX

Channel	Frequency (MHz)
01	433.96
--	--

Remark: The EUT can works in the whole band H: 433.050 MHz to 434.790 MHz . this report only recorded one channel result, And the use frequency of the EUT meets the standard requirements .



2.2 DESCRIPTION OF TEST CONDITIONS

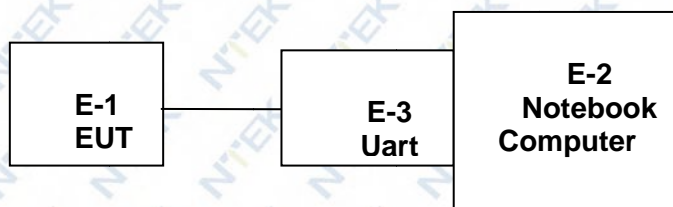1. Test setup



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	LoRa Module	 , 	Ra-01	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4 TEST CONDITIONS

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	-10°C ~ 70°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 3.3V	DC 2.7-3.6V

Note:

(1) Tests at extreme temperatures shall be made in accordance with the procedures specified in EN 300220-1 V3.1.1 clause 4.3.4.1.1 at the upper and lower temperatures of the operational profile declared by the manufacturer.;

(2) The lower extreme test voltages for equipment with power sources using batteries shall be as follows:

- for equipment with a battery indicator, the end point voltage as indicated;
- for equipment without a battery indicator the following end point voltages shall be used:
 - for the Leclanché or the lithium type of battery:
0,85 multiplied by the nominal voltage of the battery;
 - for the nickel-cadmium type of battery:
0,9 multiplied the nominal voltage of the battery;
- for other types of battery or equipment, the lower extreme test voltage for the discharged condition shall be declared by the equipment manufacturer..

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Test Receiver	R&S	ESPI7	101318	2019.05.13	2020.05.12	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2019.05.13	2020.05.12	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2019.05.18	2020.05.17	1 year
5	Spectrum Analyzer	Agilent	N9020A	MY49100060	2019.05.18	2020.05.17	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2019.05.13	2020.05.12	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.05.13	2020.05.12	1 year
8	Amplifier	EMC	EMC051835SE	980246	2019.05.13	2020.05.12	1 year
9	Loop Antenna	ARA	PLA-2030/B	1029	2019.05.13	2020.05.12	1 year
10	Power Meter	Agilent	E4419B	MY45102538	2019.08.06	2020.08.05	1 year
11	ESG VETCTOR SIGNAL GENERATOR	Agilent	E4438C	MY45093347	2019.05.13	2020.05.12	1 year
12	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	2019.05.13	2020.05.12	1 year
13	Power Sensor	Agilent	E9301A.	MY41495644	2019.05.18	2020.05.17	1 year

3. OPERATING FREQUENCY

3.1 LIMITS OF OPERATING FREQUENCY

Refer to chapter 4.2.1.2 of ETSI EN 300 220-2 V3.2.1 (2018-06)

The manufacturer may declare either one or more operating frequencies and operating channels. Operating channel(s) shall be entirely within operational frequency bands allowed by annex B or any NRI.

3.2 TEST PROCEDURE

Refer to chapter 5.1.1 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

3.3 CONFORMANCE

The information shown in Table 6 shall be recorded in the test report.

Table 6: Information Recorded in the Test Report for Operating Frequency test

Value	Notes
Operational Frequency band or bands	Band H: 433.050 MHz to 434.790 MHz
Nominal Operating Frequency or Frequencies	Refer to Channel list
Operating Channel width(s) - OCW	125KHz _{Note}

Note: The manufacturer declared the OCW=125kHz.

4. EFFECTIVE RADIATED POWER

4.1 LIMITS OF EFFECTIVE RADIATED POWER

Refer to chapter 4.3.1.2 of ETSI EN 300 220-2 V3.2.1 (2018-06)

The effective radiated power shall not be greater than the value allowed in annex B or in any NR for the chosen operational frequency band(s).

The limits please refer to ETSI EN 300 220-2 V3.2.1 Annex B:

Table B.1: EU wide harmonised national radio interfaces from 25 MHz to 1 000 MHz

Operational Frequency Band		Maximum effective radiated power, e.r.p.	Channel access and occupation rules (e.g. Duty cycle or LBT + AFA)	Maximum occupied bandwidth	Other usage restrictions	Band number from EC Decision 2017/1483/EU [2]
A	26,957 MHz to 27,283 MHz	10 mW e.r.p.	No requirement	The whole band		28
B	26,995 MHz, 27,045 MHz, 27,095 MHz, 27,145 MHz, 27,195 MHz	100 mW e.r.p.	$\leq 0,1\%$ duty cycle	10 kHz	Model control devices may operate without duty cycle restrictions.	29, 30, 31, 32, 33
C	40,660 MHz to 40,700 MHz	10 mW e.r.p.	No requirement	The whole band	Video applications excluded.	35
D	169,400 MHz to 169,475 MHz	500 mW e.r.p.	$\leq 1,0\%$ duty cycle For metering devices duty cycle limit is 10 %	50 kHz		37c
E	169,4000 MHz to 169,4875 MHz	10 mW	$\leq 0,1\%$ duty	The whole band		38
F	169,4875 MHz to 169,5875 MHz	10 mW	$\leq 0,001\%$ duty cycle Between 00.00 and 06.00 local time a duty cycle limit of 0,1 % may be used	The whole band	Equipment that concentrates or multiplexes individual equipment is excluded.	39b
G	169,5875 MHz to 169,8125 MHz	10 mW	$\leq 0,1\%$ duty cycle	The whole band		40
H	433,050 MHz to 434,790 MHz	10 mW	10 %	The whole band		44b, 45b

4.2 TEST PROCEDURE


Refer to chapter 5.2.2.2 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

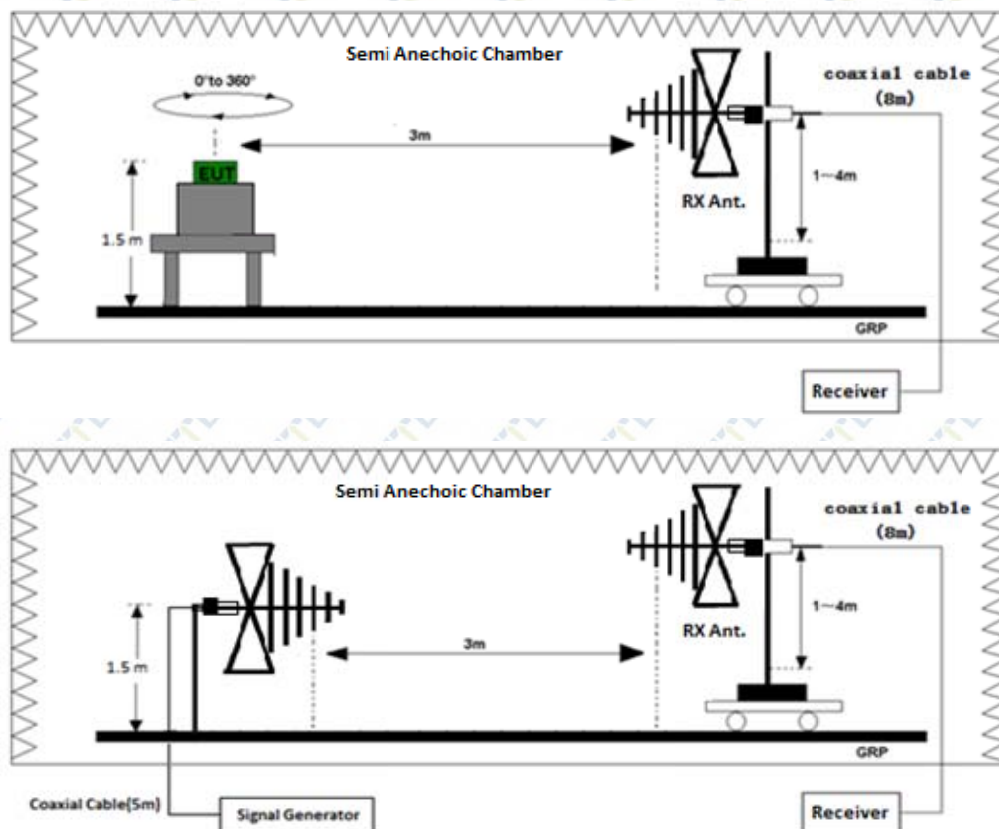

4.5 TEST RESULTS

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX Mode		

Band H:

Frequency	Ant	SG Level	Pcl	Ga	Correction	(ERP)	ERP	Limits	RESULT
(MHz)	H / V	(dBm)	(dB)	(dB)	(dBi)	(dBm)	(mW)	(mW)	
433.96	H	-4.08	2.39	12.35	2.15	3.73	2.355	10	PASS
433.96	V	-2.67	2.39	12.35	2.15	5.14	3.266	10	PASS

Note: Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl +Ga

ERP(dBm)=EIRP-2.15

5. MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY

5.1 APPLICABILITY

Maximum e.r.p. power spectral density applies to transmitters using annex B bands I.
Maximum e.r.p. power spectral density applies to transmitters using DSSS or wideband techniques other than FHSS modulation, in annex C band W, AA or AC.

5.2 LIMITS OF MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY


The Maximum e.r.p. power spectral density shall not be greater than the value allowed in annex B or any NRI for the chosen operational frequency band(s).

5.3 TEST PROCEDURES

Refer to chapter 5.3.4 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

5.4 TEST SETUP



5.5 TEST RESULTS

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	N/A
Test Mode:	N/A		

The Maximum e.r.p. spectral density shall not be required for EUT operating in Band H.

6. DUTY CYCLE

6.1 APPLICABILITY

Duty cycle applies to all transmitters except EUT with polite spectrum access (described in EN 300220-2 V3.2.1 clause 4.5) where permitted in annex B, table B.1 or annex C, table C.1 or any NRI.

6.2 LIMITS OF DUTY CYCLE

The limits please refer to ETSI EN 300 220-2 V3.2.1 Annex B:

Table B.1: EU wide harmonised national radio interfaces from 25 MHz to 1 000 MHz


Operational Frequency Band		Maximum effective radiated power, e.r.p.	Channel access and occupation rules (e.g. Duty cycle or LBT + AFA)	Maximum occupied bandwidth	Other usage restrictions	Band number from EC Decision 2017/1483/EU [2]
A	26,957 MHz to 27,283 MHz	10 mW e.r.p.	No requirement	The whole band		28
B	26,995 MHz, 27,045 MHz, 27,095 MHz, 27,145 MHz, 27,195 MHz	100 mW e.r.p.	$\leq 0,1 \%$ duty cycle	10 kHz	Model control devices may operate without duty cycle restrictions.	29, 30, 31, 32, 33
C	40,660 MHz to 40,700 MHz	10 mW e.r.p.	No requirement	The whole band	Video applications excluded.	35
D	169,400 MHz to 169,475 MHz	500 mW e.r.p.	$\leq 1,0 \%$ duty cycle For metering devices duty cycle limit is 10 %	50 kHz		37c
E	169,4000 MHz to 169,4875 MHz	10 mW	$\leq 0,1 \%$ duty	The whole band		38
F	169,4875 MHz to 169,5875 MHz	10 mW	$\leq 0,001 \%$ duty cycle Between 00.00 and 06.00 local time a duty cycle limit of 0,1 % may be used	The whole band	Equipment that concentrates or multiplexes individual equipment is excluded.	39b
G	169,5875 MHz to 169,8125 MHz	10 mW	$\leq 0,1 \%$ duty cycle	The whole band		40
H	433,050 MHz to 434,790 MHz	10 mW	10 %	The whole band		44b, 45b

6.3 TEST PROCEDURE

Refer to chapter 5.4 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

6.4 TEST SETUP



6.5 TEST RESULTS

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX-Band H		

Duty Cycle	Limit	Result
2.894%	10%	Complies

The duty cycle is simply the on time divided by the period:

$T_{ON}=104.2\text{ms}$,


$T_{ON(Total)}=104.2\text{ms}\times 1=104.2\text{ms}$,

T_p = one hour=3600000ms, N means the number of times a product is transmit in one hour.

Duty Cycle= $T_{ON(Total)}\times N/T_p=104.2\times 1000/3600000=2.894\%$,

Note: The client declared keystrokes not more than 10000 times per hour.

Test Plot

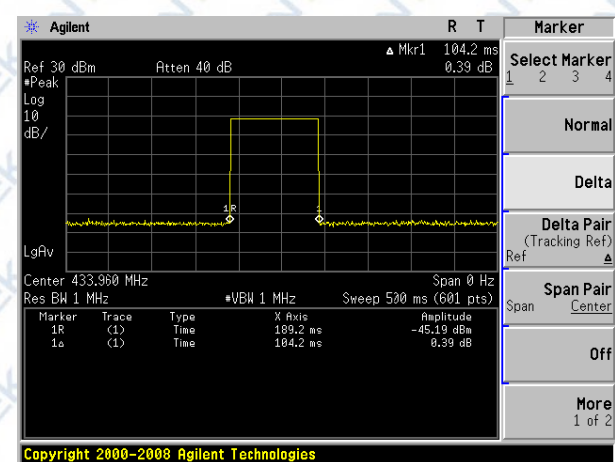

7. OCCUPIED BANDWIDTH

7.1 APPLICABILITY

Maximum occupied bandwidth applies to all transmitters.

7.2 LIMITS OF OCCUPIED BANDWIDTH

The occupied bandwidth of the EUT according to ETSI EN 300 220-1 [1], clause 5.6.2 shall comply with the limits in annex B or any NRI for the chosen operational frequency band(s).

The limits please refer to ETSI EN 300 220-2 V3.2.1 Annex B:

Table B.1: EU wide harmonised national radio interfaces from 25 MHz to 1 000 MHz


Operational Frequency Band		Maximum effective radiated power, e.r.p.	Channel access and occupation rules (e.g. Duty cycle or LBT + AFA)	Maximum occupied bandwidth	Other usage restrictions	Band number from EC Decision 2017/1483/EU [2]
A	26,957 MHz to 27,283 MHz	10 mW e.r.p.	No requirement	The whole band		28
B	26,995 MHz, 27,045 MHz, 27,095 MHz, 27,145 MHz, 27,195 MHz	100 mW e.r.p.	$\leq 0,1\%$ duty cycle	10 kHz	Model control devices may operate without duty cycle restrictions.	29, 30, 31, 32, 33
C	40,660 MHz to 40,700 MHz	10 mW e.r.p.	No requirement	The whole band	Video applications excluded.	35
D	169,400 MHz to 169,475 MHz	500 mW e.r.p.	$\leq 1,0\%$ duty cycle For metering devices duty cycle limit is 10 %	50 kHz		37c
E	169,4000 MHz to 169,4875 MHz	10 mW	$\leq 0,1\%$ duty	The whole band		38
F	169,4875 MHz to 169,5875 MHz	10 mW	$\leq 0,001\%$ duty cycle Between 00.00 and 06.00 local time a duty cycle limit of 0,1 % may be used	The whole band	Equipment that concentrates or multiplexes individual equipment is excluded.	39b
G	169,5875 MHz to 169,8125 MHz	10 mW	$\leq 0,1\%$ duty cycle	The whole band		40
H	433,050 MHz to 434,790 MHz	10 mW	10 %	The whole band		44b, 45b

7.3 TEST PROCEDURE

Refer to chapter 5.3.5 of ETSI EN 300 220 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

7.4 TEST SETUP




7.5 TEST RESULTS

EUT :	LoRa Module	Model Name:	Ra-01
Temperature :	26°C	Relative Humidity:	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX		

Band	CHANNEL	CHANNEL FREQUENCY (MHz)	99%OCCUPIED BANDWIDTH (KHz)	Measured frequencies		Limit	PASS /FAIL
				FL (MHz)	FH (MHz)		
H	01	433.96	124.8465	433.898	433.022	Flow>433,040MHz Fhigh<434,790MHz voice limited to 25 kHz	PASS

Test Plot

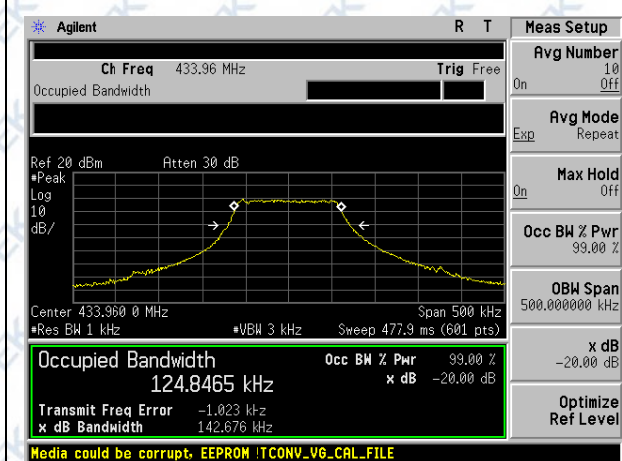

8. TX OUT OF BAND EMISSIONS

8.1 APPLICABILITY

TX Out of Band Emissions applies to all transmitters with OCW > 25 kHz.

8.2 LIMITS OF TX OUT OF BAND EMISSIONS

The EUT shall comply with reference limits defined in ETSI EN 300 220-1 [1], clause 5.8.2.

The EUT emissions level in OOB domains for the Operating Channel and the Operational Frequency Band shall be less or equal to Table 15 spectrum mask.

Table 15: Emission limits in the Out Of Band domains

Domain	Frequency Range	RBW _{REF}	Max power limit
OOB limits applicable to Operational Frequency Band (See Figure 6)	$f \leq f_{\text{low_OFB}} - 400 \text{ kHz}$	10 kHz	-36 dBm
	$F_{\text{low_OFB}} - 400 \text{ kHz} \leq f \leq f_{\text{low_OFB}} - 200 \text{ kHz}$	1 kHz	-36 dBm
	$f_{\text{low}} - 200 \text{ kHz} \leq f < f_{\text{low_OFB}}$	1 kHz	See Figure 6
	$f = f_{\text{low_OFB}}$	1 kHz	0 dBm
	$f = f_{\text{high_OFB}}$	1 kHz	0 dBm
	$F_{\text{high_OFB}} < f \leq f_{\text{high_OFB}} + 200 \text{ kHz}$	1 kHz	See Figure 6
	$F_{\text{high_OFB}} + 200 \text{ kHz} \leq f \leq f_{\text{high_OFB}} + 400 \text{ kHz}$	1 kHz	-36 dBm
	$F_{\text{high_OFB}} + 400 \text{ kHz} \leq f$	10 kHz	-36 dBm
OOB limits applicable to Operating Channel (See Figure 5)	$f = f_c - 2.5 \times \text{OCW}$	1 kHz	-36 dBm
	$f_c - 2.5 \times \text{OCW} \leq f \leq f_c - 0.5 \times \text{OCW}$	1 kHz	See Figure 5
	$f = f_c - 0.5 \times \text{OCW}$	1 kHz	0 dBm
	$f = f_c + 0.5 \times \text{OCW}$	1 kHz	0 dBm
	$f_c + 0.5 \times \text{OCW} \leq f \leq f_c + 2.5 \times \text{OCW}$	1 kHz	See Figure 5
	$f = f_c + 2.5 \times \text{OCW}$	1 kHz	-36 dBm

NOTE: f is the measurement frequency.
 f_c is the Operating Frequency.
 $F_{\text{low_OFB}}$ is the lower edge of the Operational Frequency Band.
 $F_{\text{high_OFB}}$ is the upper edge of the Operational Frequency Band.
OCW is the operating channel bandwidth.

8.3 TEST PROCEDURES

Refer to chapter 5.8 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

8.4 TEST SETUP



These measurements only were performed at normal test conditions. The measurement shall be performed only on the lowest and the highest frequency within the ststed frequency range. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software has been activated to set the EUT on specific status.

8.5 TEST RESULTS

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX		

OCW=124.8465kHz

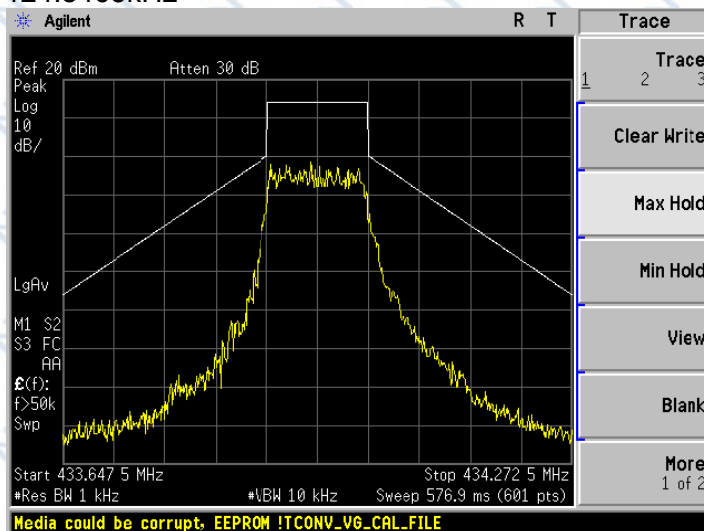


Figure 5 Out Of Band Domain for Operating Channel with reference BW

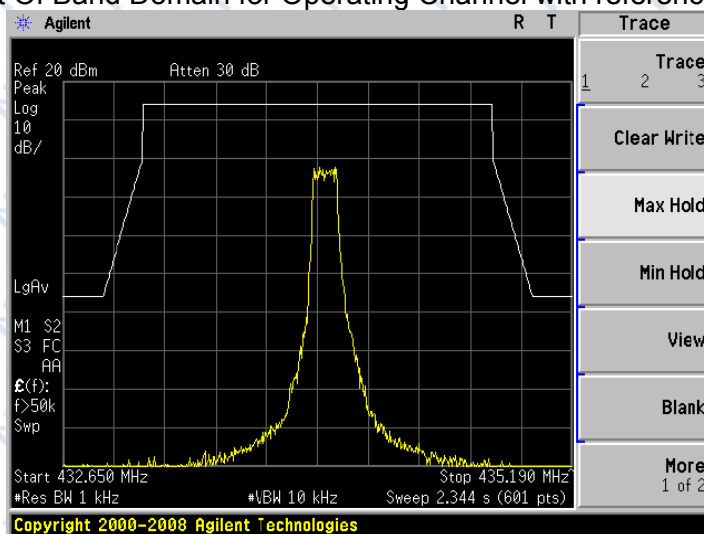


Figure 6 Out Of Band Domain for Operational Frequency Band with reference BW

9. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

9.1 APPLICABILITY

This items applies to all equipment.

9.2 LIMITS OF UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

Refer to chapter 5.9.2 of ETSI EN 300 220-1 V3.1.1

The power of any unwanted emission in the spurious domain shall not exceed the values given in Table 19.

Table 19: Spurious domain emission limits

Frequency State	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies below 1 000 MHz	Frequencies above 1 000 MHz
TX mode	-54 dBm	-36 dBm	-30 dBm
RX and all other modes	-57 dBm	-57 dBm	-47 dBm

9.3 MEASURING INSTRUMENTS AND SETTING

Operating Mode	Frequency Range	RBW _{REF} (see note 2)
Transmit mode	$9 \text{ kHz} \leq f < 150 \text{ kHz}$	1 kHz
	$150 \text{ kHz} \leq f < 30 \text{ MHz}$	10 kHz
	$30 \text{ MHz} \leq f < f_c - m$	100 kHz
	$f_c - m \leq f < f_c - n$	10 kHz
	$f_c - n \leq f < f_c - p$	1 kHz
	$f_c + p < f \leq f_c + n$	1 kHz
	$f_c + n < f \leq f_c + m$	10 kHz
	$f_c + m < f \leq 1 \text{ GHz}$	100 kHz
	$1 \text{ GHz} < f \leq 6 \text{ GHz}$	1 MHz

NOTE 1: f is the measurement frequency.
 f_c is the Operating Frequency.
 m is 10 x OCW or 500 kHz, whichever is the greater.
 n is 4 x OCW or 100 kHz, whichever is the greater.
 p is 2,5 x OCW.

NOTE 2: If the value of RBW used for measurement is different from RBW_{REF}, use bandwidth correction from clause 4.3.10.1.

Table 22: Spurious Radiations radiated Measurement Frequency Range



Frequency Range
25 MHz to 6 GHz
NOTE: The measurements need only to be performed over the frequency range 4 GHz to 6 GHz if emissions are detected within 10 dB of the specified limit between 1,5 GHz and 4 GHz.

9.4 TEST PROCEDURES



Refer to chapter 5.9.3.3.2 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement

9.5 TEST SETUP LAYOUT

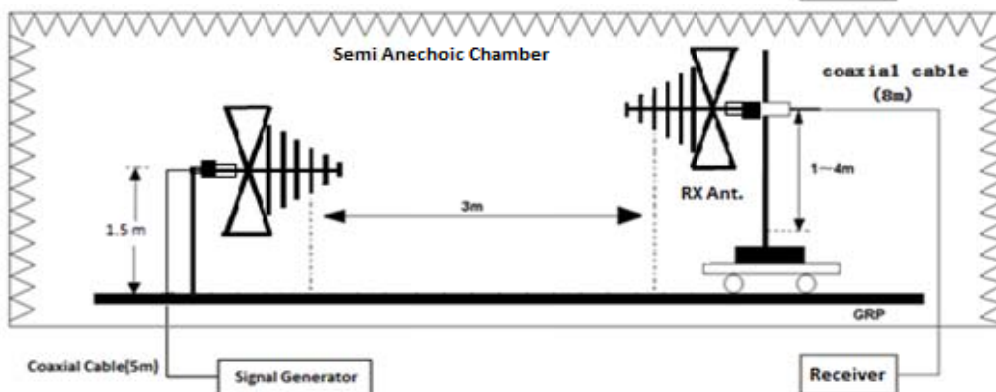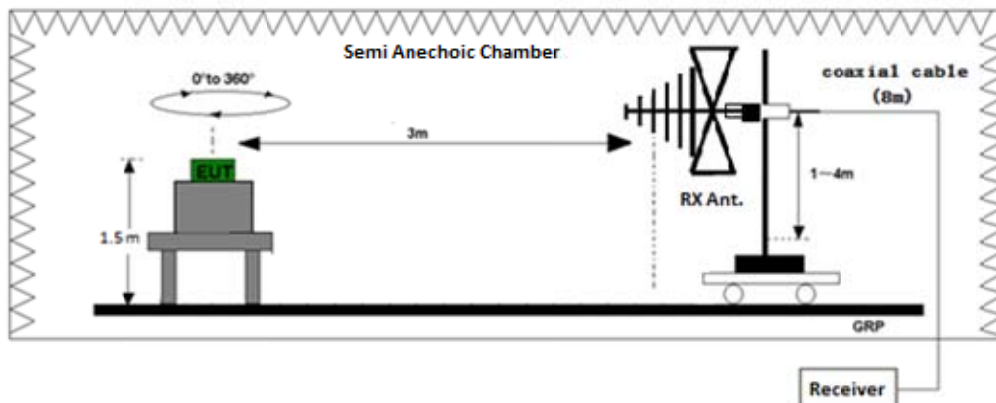

Test set-up of radiated disturbance (30MHz-1GHz)

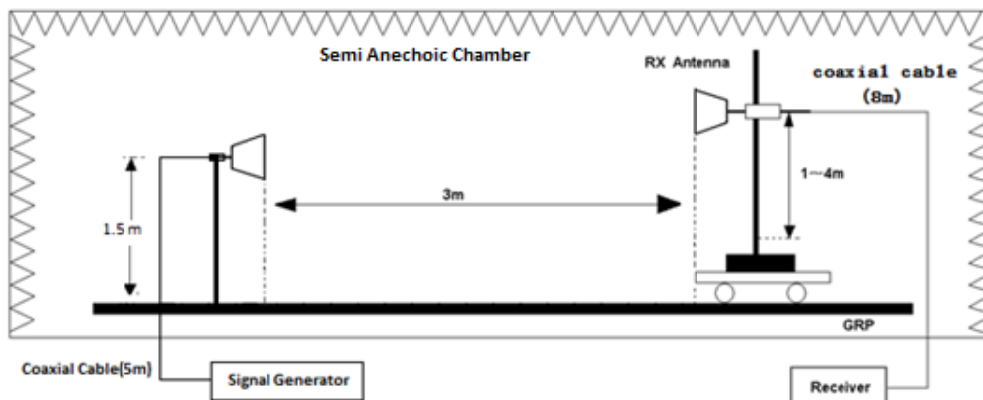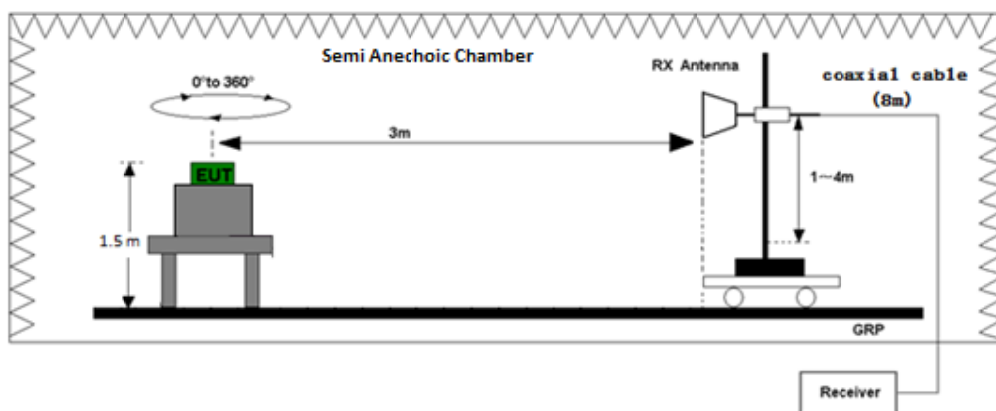

Test set-up of radiated disturbance (above 1GHz)

9.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

9.7 TEST RESULTS

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Power:	DC 3.3V
Test Mode:	TX		

BELOW 1 GHz WORST- CASE DATA (30 MHz ~ 1GHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	35.7490	-97.20	17.03	-80.17	-36.00	-44.17	peak
V	50.5859	-94.02	9.38	-84.64	-54.00	-30.64	peak
V	101.2883	-94.81	10.26	-84.55	-54.00	-30.55	peak
V	138.8735	-94.84	11.00	-83.84	-36.00	-47.84	peak
V	647.3854	-96.53	20.32	-76.21	-54.00	-22.21	peak
V	868.6760	-83.81	22.80	-61.01	-54.00	-7.01	peak
H	37.2854	-96.77	16.17	-80.60	-36.00	-44.60	peak
H	48.5016	-92.80	9.80	-83.00	-54.00	-29.00	peak
H	78.4133	-93.92	9.39	-84.53	-36.00	-48.53	peak
H	106.0126	-96.62	10.28	-86.34	-54.00	-32.34	peak
H	205.6750	-90.46	11.49	-78.97	-54.00	-24.97	peak
H	873.7358	-85.09	19.93	-65.16	-54.00	-11.16	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 6GHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1301.805	-67.08	3.72	-63.36	-30	-33.36	peak
V	1735.740	-67.08	3.15	-63.93	-30	-33.93	peak
V	2169.675	-66.06	8.13	-57.93	-30	-27.93	peak
V	2615.625	-66.33	9.27	-57.06	-30	-27.06	peak
V	5406.250	-68.49	8.97	-59.52	-30	-29.52	peak
H	1301.805	-67.36	3.43	-63.93	-30	-33.93	peak
H	1735.740	-67.53	3.47	-64.06	-30	-34.06	peak
H	2169.675	-66.99	8.44	-58.55	-30	-28.55	peak
H	2615.625	-68.75	9.48	-59.27	-30	-29.27	peak
H	5406.250	-67.07	8.48	-58.59	-30	-28.59	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

EUT:	Wall Mounted Ventilation	Model Name:	VT260 #
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Power:	AC 230V/50HZ
Test Mode:	RX		

BELOW 1 GHz WORST- CASE DATA (30 MHz ~ 1GHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	30.6371	-100.56	19.34	-81.22	-57.00	-24.22	peak
V	43.3534	-94.64	12.92	-81.72	-57.00	-24.72	peak
V	73.1025	-95.48	9.74	-85.74	-57.00	-28.74	peak
V	151.5971	-96.98	11.75	-85.23	-57.00	-28.23	peak
V	282.9852	-95.13	11.86	-83.27	-57.00	-26.27	peak
V	854.7031	-92.57	19.49	-73.08	-57.00	-16.08	peak
H	30.7454	-101.42	19.30	-82.12	-57.00	-25.12	peak
H	44.9004	-96.00	11.73	-84.27	-57.00	-27.27	peak
H	72.8465	-95.89	9.72	-86.17	-57.00	-29.17	peak
H	156.4576	-98.29	11.74	-86.55	-57.00	-29.55	peak
H	289.0020	-94.99	12.18	-82.81	-57.00	-25.81	peak
H	868.7866	-90.02	19.69	-70.33	-57.00	-13.33	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 6GHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1381.500	-71.08	7.27	-63.81	-47.00	-16.81	peak
V	2020.000	-72.31	8.78	-63.53	-47.00	-16.53	peak
V	3465.000	-71.28	8.67	-62.61	-47.00	-15.61	peak
V	4145.000	-69.94	6.70	-63.24	-47.00	-16.24	peak
H	1352.500	-68.58	7.27	-61.31	-47.00	-14.31	peak
H	2020.000	-71.81	8.15	-63.66	-47.00	-16.66	peak
H	3465.000	-70.81	8.78	-62.03	-47.00	-15.03	peak
H	5250.000	-69.87	6.10	-63.77	-47.00	-16.77	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

10 TRANSIENT POWER

10.1 APPLICABILITY

Transient power applies to all transmitters.

10.2 LIMITS OF TRANSIENT POWER

The EUT shall comply with reference limits defined in ETSI EN 300 220-1 [1], clause 5.10.2.

The transient power shall not exceed the values given in Table 23.

Table 23: Transmitter Transient Power limits


Absolute offset from centre frequency	RBW _{REF}	Peak power limit applicable at measurement points
≤ 400 kHz	1 kHz	0 dBm
> 400 kHz	1 kHz	-27 dBm

10.3 TEST PROCEDURES

Refer to chapter 5.10.3.2 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

10.4 TEST SETUP



10.5 TEST RESULT

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX		

OCW=124.8465kHz

Frequency	Center Frequency	RBW	Max Vaule	Limit	Results
	MHz	(kHz)	(dBm)	(dBm)	(P/F)
-0,5 x OCW - 3 kHz	433.8945	1kHz	-50.177	0 dBm	PASS
0,5 x OCW + 3 kHz	434.0255	1kHz	-47.416	0 dBm	PASS
-OCW	433.835	3kHz	-43.72	0 dBm	PASS
+OCW	434.085	3kHz	-43.741	0 dBm	PASS
-0,5 x OCW - 400 kHz	433.4975	100kHz	-61.102	-27 dBm	PASS
0,5 x OCW + 400 kHz	434.4225	100kHz	-63.565	-27 dBm	PASS
-0,5 x OCW -1 200 kHz	432.6975	300kHz	-66.314	-27 dBm	PASS
0,5 x OCW +1 200 kHz	435.2225	300kHz	-66.755	-27 dBm	PASS

11. ADJACENT CHANNEL POWER

11.1 APPLICABILITY

Adjacent channel power applies to all transmitters with $OCW \leq 25$ kHz.

11.2 LIMITS OF ADJACENT CHANNEL POWER

Where the Operating Channel Width is less than or equal to 25 kHz, the power in the adjacent channels shall not exceed the reference limits defined in ETSI EN 300 220-1 [1], clause 5.11.2.

Table 26: Adjacent channel power limits for transmitters with $OCW \leq 25$ kHz


		Adjacent Channel power integrated over 0,7 x OCW	Alternate Adjacent Channel power integrated over 0,7 x OCW
OCW < 20 kHz	Normal test conditions	-20 dBm	-20 dBm
	Extreme test conditions	-15 dBm	-20 dBm
OCW \geq 20 kHz	Normal test conditions	-37 dBm	-40 dBm
	Extreme test conditions	-32 dBm	-37 dBm

11.3 TEST PROCEDURES

Refer to chapter 5.11.3.3 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

11.4 TEST SETUP



11.5 TEST RESULT

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	N/A
Test Mode:	N/A		

Note: Not applicable .

12. TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS

12.1 APPLICABILITY

TX behaviour under low voltage condition applies to battery powered EUT.

12.2 LIMITS OF TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS

The EUT shall comply with reference limits defined in ETSI EN 300 220-1 [1], clause 5.12.2.

The equipment shall either:


- a) remain in the Operating Channel OC without exceeding any applicable limits (e.g. Duty Cycle);
 - or
 - b) reduce its effective radiated power below the Spurious Emission limits without exceeding any applicable limits(e.g. Duty Cycle); or
 - c) shut down, (ceasing function);
- as the voltage falls below the manufacturers declared operating voltage.

12.3 TEST PROCEDURES

Refer to chapter 5.12.3.2 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

12.4 TEST SETUP



12.5 TEST RESULT

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26 °C	Relative Humidity:	60 %
Pressure:	1010 hPa	Test Power:	DC 3.3V
Test Mode:	TX		

DC power Supplied (V) DC	Conducted Power(dBm)	Limits
3.3	7.76	a) Remain on channel, for channelized equipment within the limits stated in clause 7.1.3, or within the assigned operating frequency band, for non-channelized equipment, whilst the radiated or conducted power is greater than the spurious emission limits; or b) The equipment cease to function below the providers declared operating voltage.
3.2	6.47	
3.1	6.49	
3.0	6.37	
< 3.0	No function	

Test Conditions	Stop Function Voltage (V)
T nom(°C) 20	3.0
Result	Complies

13. ADAPTIVE POWER CONTROL

13.1 APPLICABILITY

Adaptive power control applies to all EUT with adaptive power control using annex C band AF.

13.2 LIMITS OF ADAPTIVE POWER CONTROL

The EUT shall comply with reference limits defined in ETSI EN 300 220-1 [1], clause 5.13.2.

The peak power measured when active APC function at its minimum setting shall not exceed the value shown in Table 29.

Table 29: APC power limit

Parameter	Limit
Transmitted e.r.p.	+7 dBm

13.3 TEST PROCEDURES

Refer to chapter 5.12.3.2 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

13.4 TEST SETUP

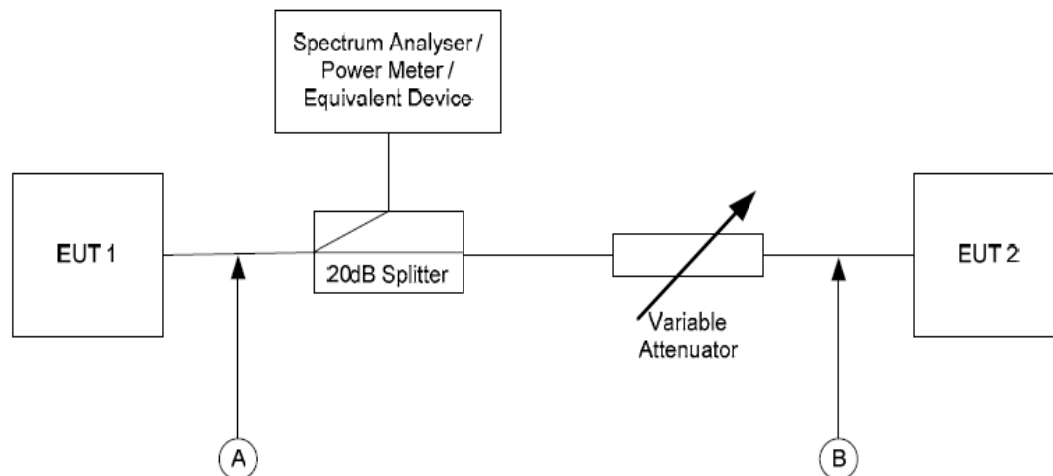


Figure 8: APC Measurement Setup

The EUTs shall be set to communicate with each other for at least the APC settling time.

The test equipment shall then be used to measure power for at least 60 seconds.

NOTE: The power measuring interval should be sufficiently long to capture transmissions from the EUT.

13.5 TEST RESULT

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26 °C	Relative Humidity:	60 %
Pressure:	1010 hPa	Test Power:	N/A
Test Mode:	N/A		

Note: The equipment is not applicable for adaptive power control.

14. RX SENSITIVITY LEVEL

14.1 APPLICABILITY

Rx sensitivity requirement is applicable to all EUT employing polite spectrum access as set out in clause 4.5.1.

14.2 LIMITS OF RX SENSITIVITY LEVEL

Refer to chapter 4.4.1.2 of ETSI EN 300 220-2 V3.2.1& EN 300 220-1 V3.1.1, clause 5.14.2.

The sensitivity for receivers shall be below or equal to Table 32 level.

Table 32: Limits for Receiver sensitivity

$$S = 10 \log RB_{\text{kHz}} - 4 \text{ dB}\mu\text{V emf}; \text{ or}$$

$$S_p = 10 \log RB_{\text{kHz}} - 117 \text{ dBm}$$

where:

- S_p is the sensitivity in dBm.
- RB is the declared receiver bandwidth in kHz.

The receiver bandwidth RB shall be declared by the manufacturer. RB is the usually 3 dB receiver bandwidth selectivity.

For example, the sensitivity for a 25 kHz Operating Channel equipment with a 16 kHz bandwidth shall be better than +8 dBμV emf for a 50 Ω receiver input impedance. This corresponds to a receiver sensitivity of -105 dBm.

14.3 TEST PROCEDURES

Refer to chapter 5.14.3.3 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

14.4 TEST SETUP



14.5 TEST RESULTS

EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	N/A
Test Mode:	N/A		

Note: The EUT has no function of polite spectrum access. So this test is not applicable.

15.BLOCKING

15.1 APPLICABILITY

Blocking applies to all receivers.

15.2 LIMITS OF BLOCKING

The blocking level shall be better or equal to category 2 reference limits level defined in ETSI EN 300 220-1 [1], clause 5.18.3.

Table 41: Blocking level parameters for RX category 2

Requirement	Limits
	Receiver category 2
Blocking at ± 2 MHz from OC edge fhigh and flow	≥ -69 dBm
Blocking at ± 10 MHz from OC edge fhigh and flow	≥ -44 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -44 dBm

The blocking levels at the specified frequency offsets shall be equal to or greater than the limits Table 42, except at frequencies where spurious responses are found.

Table 42: Blocking level parameters for RX category 1.5

Requirement	Limits
	Receiver category 1.5
Blocking at ± 2 MHz from OC edge fhigh and flow	≥ -43 dBm
Blocking at ± 10 MHz from OC edge fhigh and flow	≥ -33 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -33 dBm

The blocking levels at the specified frequency offsets shall be equal to or greater than the limits Table 43, except at frequencies where spurious responses are found.

Table 43: Blocking level parameters for RX category 1

Requirement	Limits
	Receiver category 1
Blocking at ± 2 MHz from Centre Frequency	≥ -20 dBm
Blocking at ± 10 MHz from Centre Frequency	≥ -20 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -20 dBm

15.3 TEST PROCEDURES

Refer to chapter 5.18.6.3&5.18.6.4 of ETSI EN 300 220-1 V3.1.1 (2017-02)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

15.4 TEST SETUP

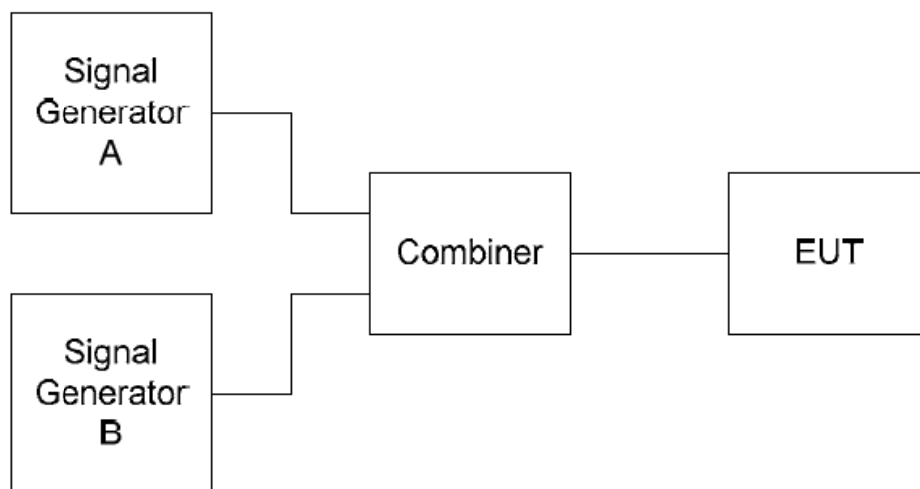


Figure 10: Blocking measurement arrangement

15.5 TEST RESULTS


EUT:	LoRa Module	Model Name:	Ra-01
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	RX		

Flow= 433.898MHz; Fhigh= 433.022MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Receiver BW(kHz)	Measurement Vause(dB)	≥ Limit(dB)
1	+2 MHz of Flow	435.898	50	-9	-20
	-2 MHz of Flow	431.898	50	-12	-20
	+2 MHz of Fhigh	435.022	50	-11	-20
	-2 MHz of Fhigh	431.022	50	-8	-20
	+10 MHz of Fhigh	443.898	50	-7	-20
	-10 MHz of Fhigh	423.898	50	-11	-20
	+10 MHz of Flow	443.022	50	-3	-20
	-10 MHz of Flow	423.022	50	-10	-20
	-21.698MHz	412.262	50	-6	-20
	+21.698 MHz	455.658	50	-6	-20

APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Radiated Measurement Photos

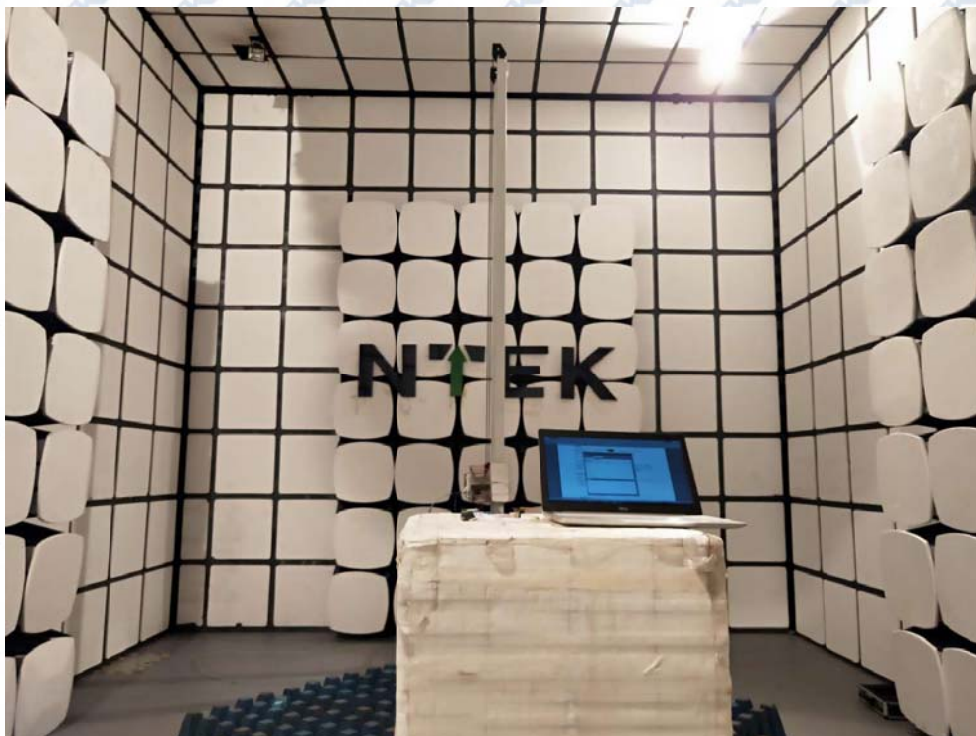

END OF REPORT